

2 1/2" LOW PRESSURE GAUGE BRASS CAPSULE AND SOCKET MODEL 25KL4

STANDARD FEATURES

- 2 1/2" dial size
- Brass internals and connection
- Brass movement
- Chrome case with twist lock plastic lens
- 1/4" NPT bottom connection
- Accuracy: 1.5% full scale
- White scale with black graduations and numerals




MODEL 25KL ▶

46

STANDARD RANGES

| RANGE | CODE | GRADUATIONS |
|---------------|------|-------------|
| 30-0"WC VAC | VB | 5" WC |
| 0-10"WC | LA | 5" WC |
| 0-15"WC | LB | .2" WC |
| 0-30"WC | LC | .5" WC |
| 0/35"WC/20oz. | LK | .5" WC |
| 0/60"WC/35oz. | LD | 1" WC |
| 0-100"WC | LE | 2" WC |
| 0-160"WC | LF | 5" WC |
| 0-200"WC | LG | 5" WC |
| 0-3 PSI | LH | .05 PSI |
| 0-5 PSI | LI | .1 PSI |
| 0-10 PSI | LJ | .2 PSI |

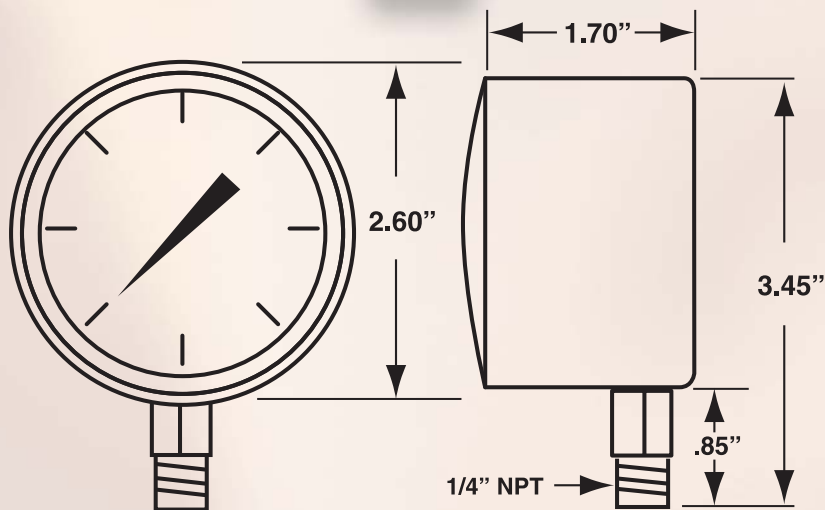

HOW TO ORDER - PLEASE SPECIFY THE FOLLOWING:

| MODEL # | RANGE |
|--------------|--------------------------------|
| 25KL4 | 2 digit code from table |

2 1/2" LOW PRESSURE GAUGE BRASS CAPSULE AND SOCKET MODEL 25KC4

STANDARD FEATURES


- 2 1/2" dial size
- Brass internals and connection
- Brass movement
- Chrome case with twist lock plastic lens
- 1/4" NPT center back connection
- Accuracy: 1.5% full scale
- White scale with black graduations and numerals



▲ MODEL 25KC

STANDARD RANGES

| RANGE | CODE | GRADUATIONS |
|---------------|------|-------------|
| 30-0"WC VAC | VB | 5" WC |
| 0-10"WC | LA | 5" WC |
| 0-15"WC | LB | .2" WC |
| 0-30"WC | LC | .5" WC |
| 0/35"WC/20oz. | LK | .5" WC |
| 0/60"WC/35oz. | LD | 1" WC |
| 0-100"WC | LE | 2" WC |
| 0-160"WC | LF | 5" WC |
| 0-200"WC | LG | 5" WC |
| 0-3 PSI | LH | .05 PSI |
| 0-5 PSI | LI | .1 PSI |
| 0-10 PSI | LJ | .2 PSI |

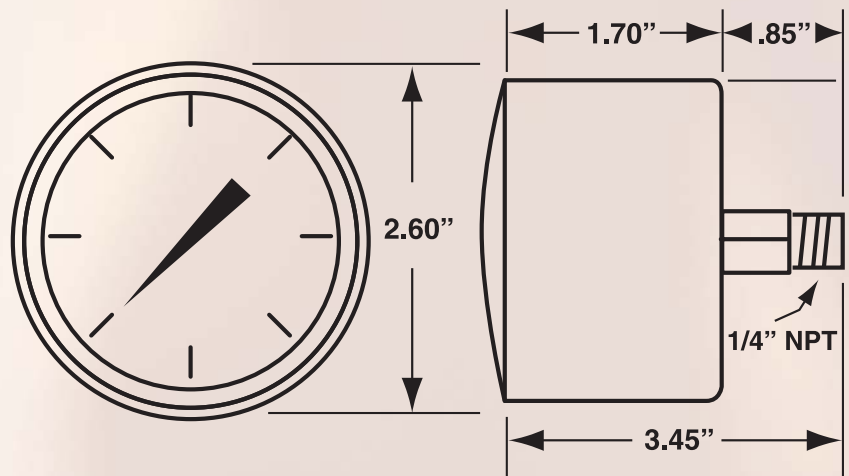

HOW TO ORDER - PLEASE SPECIFY THE FOLLOWING:

| MODEL # | RANGE |
|--------------|--------------------------------|
| 25KC4 | 2 digit code from table |